

SNLB12V100BT SPECIFICATION SHEET



About Invicta Lithium


The Invicta Lithium Black range has been specifically designed for replacement of similar size Lead acid batteries. The family is comprised of the popular sizes found in the lead acid range but with the added benefits of Lithium Iron Phosphate (LiFePO₄) technology and is ideally suited to deep cycle longer run time applications.

Features & Benefits

- Large number of cycles >2000 (100% DoD)**
 Up to 8 times cycle life of SLA lowering your total cost of ownership
- Safe and stable chemistry & Integrated BMS**
 The use of LiFePO₄ along with the integrated BMS ensures protection against over charge / discharge, temperature and short circuit providing the highest degree of safety
- Greater capacity utilisation - 60% more than SLA**
 Gives longer runtime than equivalent SLA
- High energy density (less than half of the weight of SLA)**
 Lowering total weight of application
- Fast recharge**
 Battery is charged and ready to be used sooner
- Flat Discharge Curve**
 Longer run time & more efficient use of capacity
- Extremely low self-discharge rate**
 Can sit unused for longer periods of time
- IEC 62619 Certified (Cell)**


Nominal Voltage	12.8v
Nominal Capacity (25°C, 0.33C)	100Ah
Terminal	M8
Length (mm)	306 ± 2mm
Width (mm)	169 ± 2mm
Height (mm)	211 ± 2mm
Weight	10.5kg
Max Charge Voltage	14.6 ± 0.1V
Standby	13.8 ± 0.1V
Cut off Voltage	11V
Max. Discharge Current	100A
Max. Pulse Discharge Current (3 Sec)	300A
Max. Charge Current	100A
Recommended Current Charge	≤ 50A
Cycle Life (100% DoD)	≥ 3000
Operating Temp - Charge	0 - 50°C
Operating Temp - Discharge	-20 - 55°C
Short Circuit Release	Load Release
Max. Series / Parallel Configuration	4S/4P
Dust & Water Resistance (IP)	IP65
Bluetooth Connectivity	Yes
IEC Certification No.	62619

Terminal M8 Insert

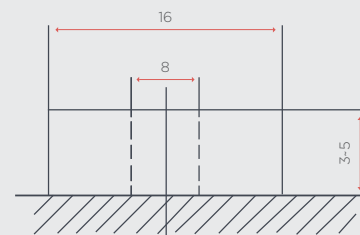


SNLB12V100BT SPECIFICATION SHEET


Discharge Curve at Different C Rates

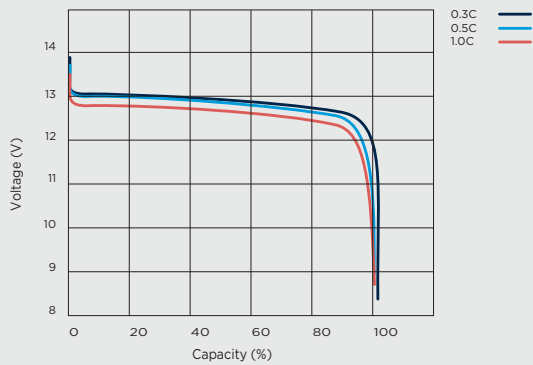


Charging Characteristic (25°C @ 0.33C)

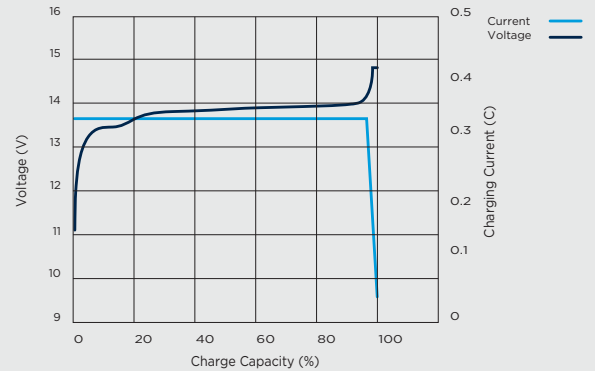

Cycle Life at Different DoD

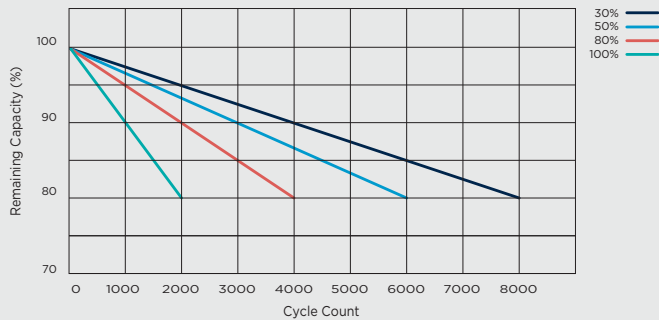

Discharge Curve at Different Ambient Temperature (0.33C)

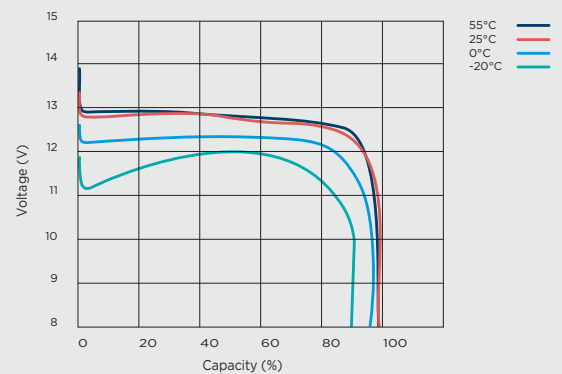

For more information or pricing please contact the team at
SPB on 1300 001 772 or sales@spb.net.au